

型式 ^{注1)}	位置数	使用压力范围 (MPa)	先导压力范围 (MPa)	接管口径	Cv值	流体及环境 温度(°C)	重量 (g)
SYA3120-□	2位单气控	0.15~0.7	(0.7 x P +0.1)~0.7	M5 x 0.8 ø4mm ø6mm	0.16	-10~60	35
SYA3220-□	2位双气控	-100kPa~0.7	0.1~0.7		0.16		37
SYA3320-□	3位中封式		0.2~0.7		0.13		39
SYA3420-□	3位中泄式				39		
SYA3520-□	3位中压式				39		
SYA5120-□	2位单气控	0.15~0.7	(0.7 x P +0.1)~0.7	Rc(PT)1/8 ø4mm ø6mm ø8mm	0.49	-10~60	58
SYA5220-□	2位双气控	-100kPa~0.7	0.1~0.7		0.49		64
SYA5320-□	3位中封式		0.2~0.7		0.45		69
SYA5420-□	3位中泄式				0.41		69
SYA5520-□	3位中压式				0.61		69
SYA7120-□	2位单气控	0.15~0.7	(0.7 x P +0.1)~0.7		Rc(PT)1/4 ø8mm ø10mm		0.93
SYA7220-□	2位双气控	-100kPa~0.7	0.1~0.7	0.93		100	
SYA7320-□	3位中封式		0.2~0.7	0.7		110	
SYA7420-□	3位中泄式			0.65			
SYA7520-□	3位中压式			0.97			

注1) □-接口口径	
M5=M5 x 0.8 (螺纹配管)	C6=φ6mm(快换接头)
01=Rc(PT)1/8 (螺纹配管)	C8=φ8mm(快换接头)
02=Rc(PT)1/4 (螺纹配管)	C10=φ10mm(快换接头)
C4=φ4mm(快换接头)	


订货举例:
2位5通单气控阀,接管口径:Rc(PT)1/8
正确型号: SYA5120-01

(SYA3120・SYA3220・SYA3320・SYA3420・SYA3520) (直接配管型)



● 外形尺寸图(毫米)

(SYA5120 · SYA5220 · SYA5320 · SYA5420 · SYA5520) (直接配管型)

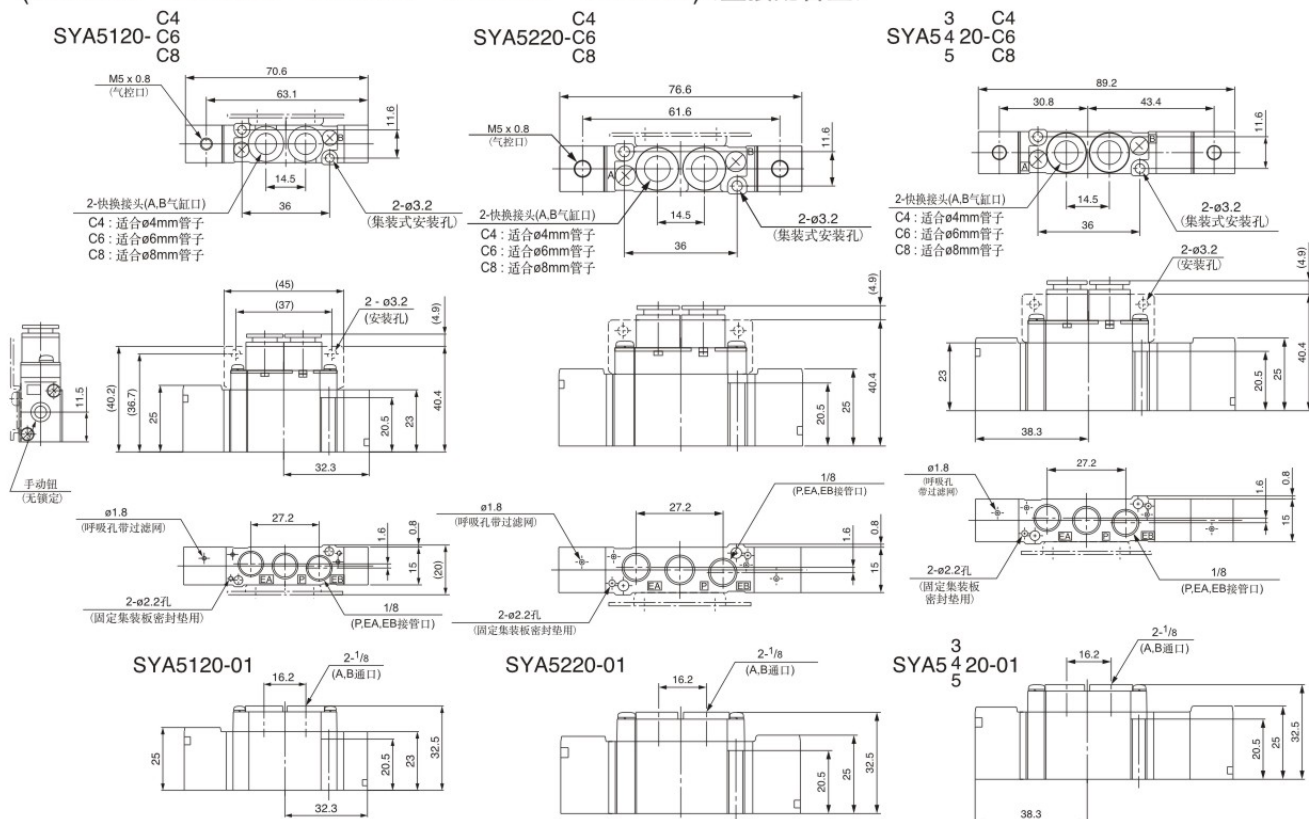

(SYA7120 · SYA7220 · SYA7320 · SYA7420 · SYA7520) (直接配管型)

SYA7120-02

SYA7220-02

SYA7420-02

